

Postbeskrivning Customerjournal_1.0 – innehåll

1 Versionshistorik.....	2
2 Relaterade dokument.....	2
3 Allmänt	2
3.1 Filnamnbeskrivning	2
3.2 Validering	2
4 Övergripande bild XML-struktur	3
5 XML-struktur Customerjournal	4
5.1 CustomerJournal/CustomerJournalInfo	5
5.1.1 CustomerJournal/CustomerJournalInfo/CustomerInfo	6
5.1.2 CustomerJournal/CustomerJournalInfo/ConsentEventInfo	8
5.1.3 CustomerJournal/CustomerJournalInfo/CustomerStatusEventInfo	9

1 Versionshistorik

Version	Datum	Beskrivning	Gjord av	Godkänd av
1.0	170310	Dokumentet skapat	JKR	

2 Relaterade dokument

Dokument	Beskrivning
CustomerJournal_[1.0].XSD	Schemafil för Customer journal

3 Allmänt

Customerjournal är det filformat som används för att kommunicera förändringar på kunderna i reskontran som härrör från den/de tjänster som avtalats.

Exempel på händelser som kan kommuniceras beroende på avtalad tjänst är:

- Att ny legal adress har hittats i de fall reskontran har avtal om adressökning
- Aktivering/deaktivering av Svenskt autogiro medgivande
- Aktivering/deaktivering av Svensk B2C EFaktura
- Att slutkundkund registrerats som avliden

3.1 Filnamnbeskrivning

Filnamn: CUSTOMERJOURNAL_<Firmanr>_<DatumTid>_<Löpnr>.xml .

<DatumTid> (YYYYMMDDHHMMSS) och är datum och tid då filen skapades.


<Löpnr> är en obruten nummerserie där firmans första fil skall ha 1 nästa 2 osv.

Exempel: CUSTOMERJOURNAL_9999_20080923124422_1.xml

3.2 Validering

Customerjournal-filen ska svara mot aktuell version av CustomerJournal_[X.X].xsd.

4 Övergripande bild XML-struktur

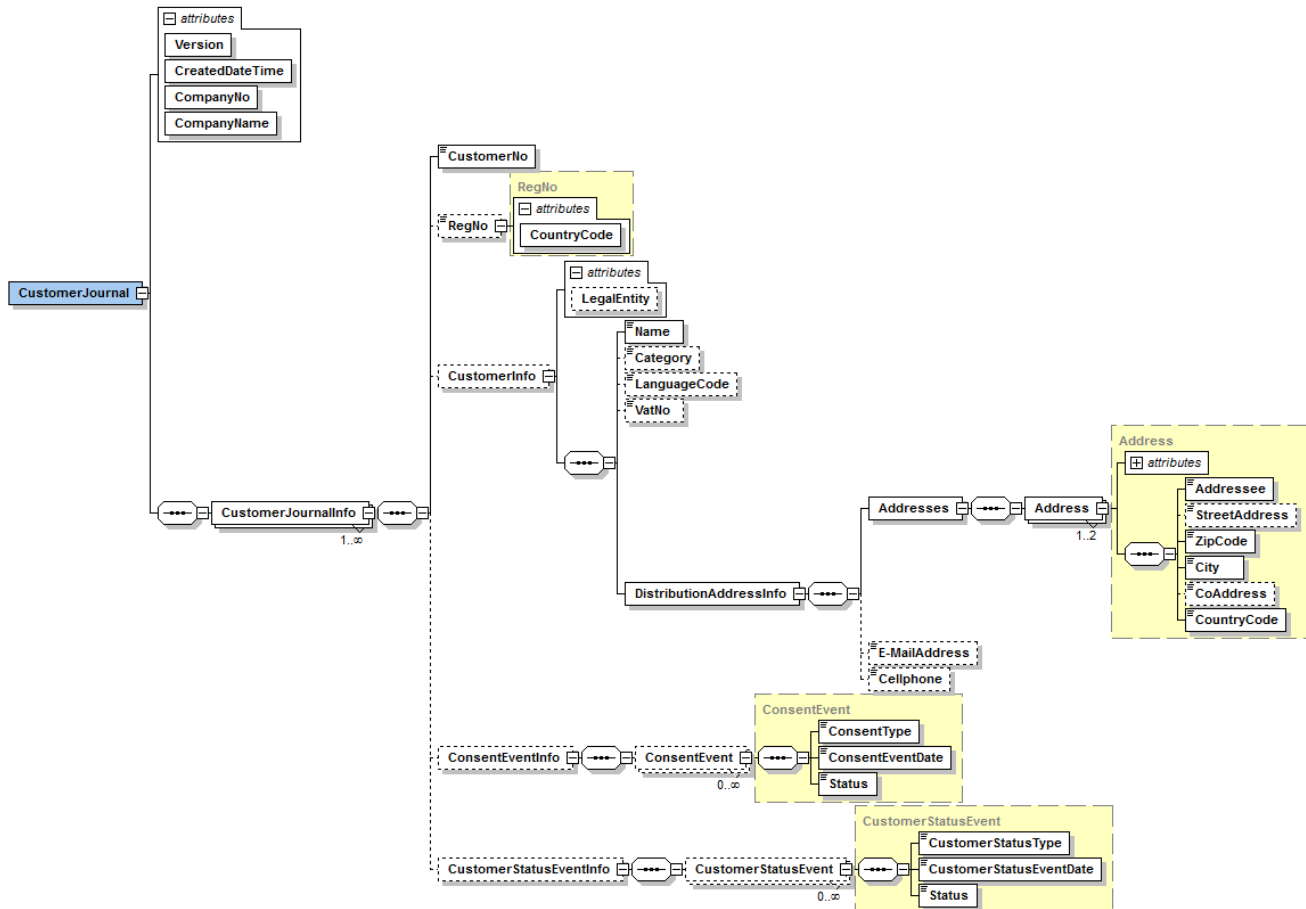

5 XML-struktur Customerjournal

element **CustomerJournal**

properties	content complex					
children	CustomerJournalInfo					
attributes	Name Version	Type xs:string	Use required	Default	Fixed 1.0	Annotation documentation The version of the schema-file (XSD) to be used for validation of the xml-file
	CreatedDateTime	xs:dateTime	required			documentation The date and time when the file was created
	CompanyNo	CompanyNumber	required			documentation Your accounts receivable number at PayEx
	CompanyName	xs:string	required			documentation The name of your company/accounts recievable at PayEx

attribute **CustomerJournal/@Version**

type	xs:string
properties	use required fixed 1.0
annotation	documentation The version of the schema-file (XSD) to be used for validation of the xml-file

attribute **CustomerJournal/@CreatedDateTime**

type	xs:dateTime
properties	use required
annotation	documentation The date and time when the file was created

attribute **CustomerJournal/@CompanyNo**

type	CompanyNumber												
properties	use required												
facets	<table border="1"> <thead> <tr> <th>Kind</th> <th>Value</th> <th>Annotation</th> </tr> </thead> <tbody> <tr> <td>minLength</td> <td>1</td> <td></td> </tr> <tr> <td>maxLength</td> <td>15</td> <td></td> </tr> <tr> <td>pattern</td> <td>[0-9]*</td> <td></td> </tr> </tbody> </table>	Kind	Value	Annotation	minLength	1		maxLength	15		pattern	[0-9]*	
Kind	Value	Annotation											
minLength	1												
maxLength	15												
pattern	[0-9]*												
annotation	documentation Your accounts receivable number at PayEx												

attribute **CustomerJournal/@CompanyName**

type	xs:string
properties	use required
annotation	documentation The name of your company/accounts receivable at PayEx

5.1 CustomerJournal/CustomerJournalInfo

element **CustomerJournal/CustomerJournalInfo**

properties	minOcc 1 maxOcc unbounded content complex
children	CustomerNo RegNo CustomerInfo ConsentEventInfo CustomerStatusEventInfo

element **CustomerJournal/CustomerJournalInfo/CustomerNo**

type	Identifier15
properties	content simple nillable false
facets	Kind Value Annotation minLength 1 maxLength 15 pattern [a-zA-Z0-9äåöÄÅÖ&/_ -]*
annotation	documentation CustomerNo is your unique identifier of the customer in the accounts receivable

element **CustomerJournal/CustomerJournalInfo/RegNo**

type	RegNo
properties	minOcc 0 maxOcc 1 content complex
facets	Kind Value Annotation minLength 1 maxLength 15 pattern [a-zA-Z0-9_!;"#<>=?\[\]@{}'
 %-/À-ÖØ-øø-ú]*
attributes	Name Type Use Default Fixed Annotation CountryCode ISO3166 required
annotation	documentation If exists, Customer social security number/corporate identity number in the accounts receivable

5.1.1 CustomerJournal/CustomerJournalInfo/CustomerInfo

element CustomerJournal/CustomerJournalInfo/CustomerInfo

properties	minOcc 0 maxOcc 1 content complex												
children	Name Category LanguageCode VatNo DistributionAddressInfo												
attributes	<table border="1"> <thead> <tr> <th>Name</th> <th>Type</th> <th>Use</th> <th>Default</th> <th>Fixed</th> <th>Annotation</th> </tr> </thead> <tbody> <tr> <td>LegalEntity</td> <td>LegalEntity</td> <td>optional</td> <td></td> <td></td> <td>documentation If exists the current legal entity of the customer in the accounts receivable.</td> </tr> </tbody> </table>	Name	Type	Use	Default	Fixed	Annotation	LegalEntity	LegalEntity	optional			documentation If exists the current legal entity of the customer in the accounts receivable.
Name	Type	Use	Default	Fixed	Annotation								
LegalEntity	LegalEntity	optional			documentation If exists the current legal entity of the customer in the accounts receivable.								

attribute CustomerJournal/CustomerJournalInfo/CustomerInfo/@LegalEntity

type	LegalEntity									
properties	use optional									
facets	<table border="1"> <thead> <tr> <th>Kind</th> <th>Value</th> <th>Annotation</th> </tr> </thead> <tbody> <tr> <td>enumeration</td> <td>Private</td> <td></td> </tr> <tr> <td>enumeration</td> <td>Business</td> <td></td> </tr> </tbody> </table>	Kind	Value	Annotation	enumeration	Private		enumeration	Business	
Kind	Value	Annotation								
enumeration	Private									
enumeration	Business									
annotation	documentation If exists the current legal entity of the customer in the accounts receivable									

element CustomerJournal/CustomerJournalInfo/CustomerInfo/Name

type	NameAddressString72												
properties	content simple												
facets	<table border="1"> <thead> <tr> <th>Kind</th> <th>Value</th> <th>Annotation</th> </tr> </thead> <tbody> <tr> <td>minLength</td> <td>1</td> <td></td> </tr> <tr> <td>maxLength</td> <td>72</td> <td></td> </tr> <tr> <td>pattern</td> <td>[a-zA-Z0-9_!;&quot;#&lt;&gt;=?\[\]@{}'&#xA;&#xD; %/À-ÖØ-öø-ú]*</td> <td></td> </tr> </tbody> </table>	Kind	Value	Annotation	minLength	1		maxLength	72		pattern	[a-zA-Z0-9_!;"#<>=?\[\]@{}'
 %/À-ÖØ-öø-ú]*	
Kind	Value	Annotation											
minLength	1												
maxLength	72												
pattern	[a-zA-Z0-9_!;"#<>=?\[\]@{}'
 %/À-ÖØ-öø-ú]*												
annotation	documentation The current full name of the customer in the accounts receivable.												

element CustomerJournal/CustomerJournalInfo/CustomerInfo/Category

type	String10												
properties	minOcc 0 maxOcc 1 content simple												
facets	<table border="1"> <thead> <tr> <th>Kind</th> <th>Value</th> <th>Annotation</th> </tr> </thead> <tbody> <tr> <td>minLength</td> <td>1</td> <td></td> </tr> <tr> <td>maxLength</td> <td>10</td> <td></td> </tr> <tr> <td>pattern</td> <td>[a-zA-Z0-9_!;&quot;#&lt;&gt;=?\[\]@{}'&#xA;&#xD; %/À-ÖØ-öø-ú]*</td> <td></td> </tr> </tbody> </table>	Kind	Value	Annotation	minLength	1		maxLength	10		pattern	[a-zA-Z0-9_!;"#<>=?\[\]@{}'
 %/À-ÖØ-öø-ú]*	
Kind	Value	Annotation											
minLength	1												
maxLength	10												
pattern	[a-zA-Z0-9_!;"#<>=?\[\]@{}'
 %/À-ÖØ-öø-ú]*												
annotation	documentation If exists, the current category the customer is a member of in the accounts receivable												

element **CustomerJournal/CustomerJournalInfo/CustomerInfo/LanguageCode**

type	ISO639		
properties	minOcc	0	
	maxOcc	1	
	content	simple	
facets	Kind	Value	Annotation
	minLength	1	
	pattern	[a-zA-Z0-9_!;"#<>=?\[\]@{}'
 %/À-ÖØ-øø-ú]*	
	enumeration	SV	
	enumeration	NO	
	enumeration	DA	
	enumeration	FI	
	enumeration	EN	
annotation	documentation	If exists, the current differing language code according to iso 639 set for the customer in the accounts receivable	

element **CustomerJournal/CustomerJournalInfo/CustomerInfo/VatNo**

type	VatNumber		
properties	minOcc	0	
	maxOcc	1	
	content	simple	
facets	Kind	Value	Annotation
	minLength	7	
	maxLength	14	
	pattern	[A-Z]{2}.*	
annotation	documentation	If exists, the current VAT registration number of the customer in the accounts receivable	

element **CustomerJournal/CustomerJournalInfo/CustomerInfo/DistributionAddressInfo**

properties	content	complex
children	Addresses E-MailAddress Cellphone	
annotation	documentation	Containing the current distribution address information of the customer in the accounts receivable

element **CustomerJournal/CustomerJournalInfo/CustomerInfo/DistributionAddressInfo/Addresses**

properties	content	complex
children	Address	
annotation	documentation	Contains the current addresses of the customer in the accounts receivable

element

CustomerJournal/CustomerJournalInfo/CustomerInfo/DistributionAddressInfo/Addresses/Address

type	Address					
properties	minOcc	1	maxOcc	2	content	complex
children	Addressee StreetAddress ZipCode City CoAddress CountryCode					
attributes	Name	Type	Use	Default	Fixed	Annotation
	AddressType	AddressType	required			documentation Type of address

element **CustomerJournal/CustomerJournalInfo/CustomerInfo/DistributionAddressInfo/E-MailAddress**

type	Email					
properties	minOcc	0	maxOcc	1	content	simple
facets	Kind	Value	Annotation			
	minLength	1	maxLength	60	pattern	[a-zA-Z0-9_!;"#<>=?\[\]@{}'
 %/À-ÖØ-öø-ú]*
annotation	documentation If exists, the current e-mail of the customer in the accounts receivable					

element **CustomerJournal/CustomerJournalInfo/CustomerInfo/DistributionAddressInfo/Cellphone**

type	String15					
properties	minOcc	0	maxOcc	1	content	simple
facets	Kind	Value	Annotation			
	minLength	1	maxLength	15	pattern	[a-zA-Z0-9_!;"#<>=?\[\]@{}'
 %/À-ÖØ-öø-ú]*
annotation	documentation If exists, the current mobile number of the customer in the accounts receivable					

5.1.2 CustomerJournal/CustomerJournalInfo/ConsentEventInfo

element **CustomerJournal/CustomerJournalInfo/ConsentEventInfo**

properties	minOcc	0	maxOcc	1	content	complex
children	ConsentEvent					
annotation	documentation Containing changes/events concerning customer consents in the accounts receivable					

element **CustomerJournal/CustomerJournalInfo/ConsentEventInfo/ConsentEvent**

type	ConsentEvent
properties	minOcc 0 maxOcc unbounded content complex
children	ConsentType ConsentEventDate Status
annotation	documentation Contains information about a consent event

5.1.3 *CustomerJournal/CustomerJournalInfo/CustomerStatusEventInfo*

element **CustomerJournal/CustomerJournalInfo/CustomerStatusEventInfo**

properties	minOcc 0 maxOcc 1 content complex
children	CustomerStatusEvent
annotation	documentation Containing changes/events concerning customer status in the accounts receivable

element **CustomerJournal/CustomerJournalInfo/CustomerStatusEventInfo/CustomerStatusEvent**

type	CustomerStatusEvent
properties	minOcc 0 maxOcc unbounded content complex
children	CustomerStatusType CustomerStatusEventDate Status
annotation	documentation Contains information about a change of the customer status in the accounts receivable

complexType **Address**

children	Addressee StreetAddress ZipCode City CoAddress CountryCode					
used by	element CustomerJournal/CustomerJournalInfo/CustomerInfo/DistributionAddressInfo/Addresses/Address					
attributes	Name AddressType	Type AddressType	Use required	Default	Fixed	Annotation documentation Type of address

attribute **Address/@AddressType**

type	AddressType		
properties	use required		
facets	Kind enumeration	Value LegalAddress	Annotation documentation Refers to the customers legal address
	enumeration	BillingAddress	documentation Refers to a possible billing address
annotation	documentation Type of address		

element Address/Addressee

type	NameAddressString72		
properties	content	simple	
facets	Kind	Value	Annotation
	minLength	1	
	maxLength	72	
	pattern	[a-zA-Z0-9_!;"#<>=?\[\]@{}'
 %-/À-ÖØ-ø-ú]*	
annotation	documentation	Current full name of addressee	

element Address/StreetAddress

type	NameAddressString35		
properties	minOcc	0	
	maxOcc	1	
	content	simple	
	nillable	false	
facets	Kind	Value	Annotation
	maxLength	35	
	pattern	[a-zA-Z0-9_!;"#<>=?\[\]@{}'
 %-/À-ÖØ-ø-ú]*	
annotation	documentation	Current street address	

element Address/ZipCode

type	ZipCode		
properties	content	simple	
	nillable	false	
facets	Kind	Value	Annotation
	maxLength	9	
	pattern	[A-Z0-9\-]*	
annotation	documentation	Current zip code	

element Address/City

type	NameAddressString27		
properties	content	simple	
	nillable	false	
facets	Kind	Value	Annotation
	minLength	1	
	maxLength	27	
	pattern	[a-zA-Z0-9_!;"#<>=?\[\]@{}'
 %-/À-ÖØ-ø-ú]*	
annotation	documentation	Current city	

element Address/CoAddress

type	NameAddressString35		
properties	minOcc	0	
	maxOcc	1	
	content	simple	
	nillable	false	
facets	Kind	Value	Annotation
	maxLength	35	
	pattern	[a-zA-Z0-9_!;"#<>=?\[\]@{}'
 %-/À-ÖØ-ø-ú]*	
annotation	documentation	If exists current care of address	

element Address/CountryCode

type	ISO3166		
properties	content	simple	
facets	Kind	Value	Annotation
	minLength	2	
	maxLength	2	
	pattern	[A-Z]*	
annotation	documentation	Current countrycode	

complexType ConsentEvent

children	ConsentType ConsentEventDate Status		
used by	element	CustomerJournal/CustomerJournalInfo/ConsentEventInfo/ConsentEvent	

element ConsentEvent/ConsentType

type	ConsentType		
properties	content	simple	
	nillable	false	
facets	Kind	Value	Annotation
	enumeration	BGAGSE	documentation Refers to a Swedish direct debit consent.
	enumeration	EInvoiceB2CSE	documentation Refers to a Swedish B2C E-invoice consent.
annotation	documentation	The type of consent affected by the event/change	

element ConsentEvent/ConsentEventDate

type	xs:date		
properties	content	simple	
	nillable	false	
annotation	documentation	The date when the event occurred	

element **ConsentEvent/Status**

type	ConsentStatus									
properties	content simple nillable false									
facets	<table border="0"> <tr> <td>Kind</td> <td>Value</td> <td>Annotation</td> </tr> <tr> <td>enumeration</td> <td>Active</td> <td>documentation The consent has been activated</td> </tr> <tr> <td>enumeration</td> <td>Cancelled</td> <td>documentation The consent has been deactivated/cancelled</td> </tr> </table>	Kind	Value	Annotation	enumeration	Active	documentation The consent has been activated	enumeration	Cancelled	documentation The consent has been deactivated/cancelled
Kind	Value	Annotation								
enumeration	Active	documentation The consent has been activated								
enumeration	Cancelled	documentation The consent has been deactivated/cancelled								
annotation	documentation The state of the consent due to the event									

complexType **CustomerStatusEvent**

children	CustomerStatusType CustomerStatusEventDate Status
used by	element CustomerJournal/CustomerJournalInfo/CustomerStatusEventInfo/CustomerStatusEvent

element **CustomerStatusEvent/CustomerStatusType**

type	CustomerStatusType						
properties	content simple nillable false						
facets	<table border="0"> <tr> <td>Kind</td> <td>Value</td> <td>Annotation</td> </tr> <tr> <td>enumeration</td> <td>Deceased</td> <td>documentation A status type that can be set on consumers</td> </tr> </table>	Kind	Value	Annotation	enumeration	Deceased	documentation A status type that can be set on consumers
Kind	Value	Annotation					
enumeration	Deceased	documentation A status type that can be set on consumers					
annotation	documentation The type of status that has been affected by the event/change						

element **CustomerStatusEvent/CustomerStatusEventDate**

type	xs:date
properties	content simple nillable false
annotation	documentation The date when the event occurred

element **CustomerStatusEvent/Status**

type	CustomerStatus									
properties	content simple nillable false									
facets	<table border="0"> <tr> <td>Kind</td> <td>Value</td> <td>Annotation</td> </tr> <tr> <td>enumeration</td> <td>Active</td> <td>documentation The status has been activated on the customer.</td> </tr> <tr> <td>enumeration</td> <td>Cancelled</td> <td>documentation The status has been deactivated on the customer.</td> </tr> </table>	Kind	Value	Annotation	enumeration	Active	documentation The status has been activated on the customer.	enumeration	Cancelled	documentation The status has been deactivated on the customer.
Kind	Value	Annotation								
enumeration	Active	documentation The status has been activated on the customer.								
enumeration	Cancelled	documentation The status has been deactivated on the customer.								
annotation	documentation The state of the customer status due to the event									

complexType **RegNo**

type	extension of String15					
properties	base String15					
used by	element CustomerJournal/CustomerJournalInfo/RegNo					
facets	Kind	Value	Annotation			
	minLength	1				
	maxLength	15				
	pattern	[a-zA-Z0-9_!;"#<>=?\[\]@{}'
 %/À-ÖØ-öø-ú]*				
attributes	Name	Type	Use	Default	Fixed	Annotation
	CountryCode	ISO3166	required			

attribute **RegNo/@CountryCode**

type	ISO3166					
properties	use required					
facets	Kind	Value	Annotation			
	minLength	2				
	maxLength	2				
	pattern	[A-Z]*				

simpleType **AddressType**

type	restriction of xs:string					
properties	base xs:string					
used by	attribute Address/@AddressType					
facets	Kind	Value	Annotation			
	enumeration	LegalAddress	documentation Refers to the customers legal address			
	enumeration	BillingAddress	documentation Refers to a possible billing address			

simpleType **CompanyNumber**

type	restriction of xs:string					
properties	base xs:string					
used by	attribute CustomerJournal/@CompanyNo					
facets	Kind	Value	Annotation			
	minLength	1				
	maxLength	15				
	pattern	[0-9]*				

simpleType **ConsentStatus**

type	restriction of xs:string		
properties	base xs:string		
used by	element ConsentEvent/Status		
facets	Kind enumeration	Value Active	Annotation documentation The consent has been activated
	enumeration	Cancelled	documentation The consent has been deactivated/cancelled

simpleType **ConsentType**

type	restriction of xs:string		
properties	base xs:string		
used by	element ConsentEvent/ConsentType		
facets	Kind enumeration	Value BGAGSE	Annotation documentation Refers to a Swedish direct debit consent.
	enumeration	EInvoiceB2CSE	documentation Refers to a Swedish B2C E-invoice consent.

simpleType **CustomerStatus**

type	restriction of xs:string		
properties	base xs:string		
used by	element CustomerStatusEvent/Status		
facets	Kind enumeration	Value Active	Annotation documentation The status has been activated on the customer.
	enumeration	Cancelled	documentation The status has been deactivated on the customer.

simpleType **CustomerStatusType**

type	restriction of xs:string		
properties	base xs:string		
used by	element CustomerStatusEvent/CustomerStatusType		
facets	Kind enumeration	Value Deceased	Annotation documentation A status type that can be set on consumers

simpleType Email

type	restriction of PXString		
properties	base PXString		
used by	element CustomerJournal/CustomerJournalInfo/CustomerInfo/DistributionAddressInfo/E-MailAddress		
facets	Kind	Value	Annotation
	minLength	1	
	maxLength	60	
	pattern	[a-zA-Z0-9_!;"#<>=?\[\]@{}'
 %-/À-ÖØ-öø-ú]*	

simpleType Identifier15

type	restriction of xs:string		
properties	base xs:string		
used by	element CustomerJournal/CustomerJournalInfo/CustomerNo		
facets	Kind	Value	Annotation
	minLength	1	
	maxLength	15	
	pattern	[a-zA-Z0-9ääöÄÖ&/_ -]*	

simpleType ISO3166

type	restriction of xs:string		
properties	base xs:string		
used by	element Address/CountryCode	attribute RegNo/@CountryCode	
facets	Kind	Value	Annotation
	minLength	2	
	maxLength	2	
	pattern	[A-Z]*	

simpleType ISO639

type	restriction of PXString		
properties	base PXString		
used by	element CustomerJournal/CustomerJournalInfo/CustomerInfo/LanguageCode		
facets	Kind	Value	Annotation
	minLength	1	
	pattern	[a-zA-Z0-9_!;"#<>=?\[\]@{}'
 %-/À-ÖØ-öø-ú]*	
	enumeration	SV	
	enumeration	NO	
	enumeration	DA	
	enumeration	FI	
	enumeration	EN	

simpleType LegalEntity

type	restriction of xs:string									
properties	base xs:string									
used by	attribute CustomerJournal/CustomerJournalInfo/CustomerInfo/@LegalEntity									
facets	<table border="1"> <thead> <tr> <th>Kind</th> <th>Value</th> <th>Annotation</th> </tr> </thead> <tbody> <tr> <td>enumeration</td> <td>Private</td> <td></td> </tr> <tr> <td>enumeration</td> <td>Business</td> <td></td> </tr> </tbody> </table>	Kind	Value	Annotation	enumeration	Private		enumeration	Business	
Kind	Value	Annotation								
enumeration	Private									
enumeration	Business									

simpleType NameAddressString27

type	restriction of PXNameAddressString												
properties	base PXNameAddressString												
used by	element Address/City												
facets	<table border="1"> <thead> <tr> <th>Kind</th> <th>Value</th> <th>Annotation</th> </tr> </thead> <tbody> <tr> <td>minLength</td> <td>1</td> <td></td> </tr> <tr> <td>maxLength</td> <td>27</td> <td></td> </tr> <tr> <td>pattern</td> <td colspan="2">[a-zA-Z0-9_!;&quot;#&lt;&gt;=?\[\]@{}'&#xA;&#xD; %-/À-ÖØ-öø-úü]*</td> </tr> </tbody> </table>	Kind	Value	Annotation	minLength	1		maxLength	27		pattern	[a-zA-Z0-9_!;"#<>=?\[\]@{}'
 %-/À-ÖØ-öø-úü]*	
Kind	Value	Annotation											
minLength	1												
maxLength	27												
pattern	[a-zA-Z0-9_!;"#<>=?\[\]@{}'
 %-/À-ÖØ-öø-úü]*												

simpleType NameAddressString35

type	restriction of PXNameAddressString									
properties	base PXNameAddressString									
used by	elements Address/CoAddress Address/StreetAddress									
facets	<table border="1"> <thead> <tr> <th>Kind</th> <th>Value</th> <th>Annotation</th> </tr> </thead> <tbody> <tr> <td>maxLength</td> <td>35</td> <td></td> </tr> <tr> <td>pattern</td> <td colspan="2">[a-zA-Z0-9_!;&quot;#&lt;&gt;=?\[\]@{}'&#xA;&#xD; %-/À-ÖØ-öø-úü]*</td> </tr> </tbody> </table>	Kind	Value	Annotation	maxLength	35		pattern	[a-zA-Z0-9_!;"#<>=?\[\]@{}'
 %-/À-ÖØ-öø-úü]*	
Kind	Value	Annotation								
maxLength	35									
pattern	[a-zA-Z0-9_!;"#<>=?\[\]@{}'
 %-/À-ÖØ-öø-úü]*									

simpleType NameAddressString72

type	restriction of PXNameAddressString												
properties	base PXNameAddressString												
used by	elements Address/Addressee CustomerJournal/CustomerJournalInfo/CustomerInfo/Name												
facets	<table border="1"> <thead> <tr> <th>Kind</th> <th>Value</th> <th>Annotation</th> </tr> </thead> <tbody> <tr> <td>minLength</td> <td>1</td> <td></td> </tr> <tr> <td>maxLength</td> <td>72</td> <td></td> </tr> <tr> <td>pattern</td> <td colspan="2">[a-zA-Z0-9_!;&quot;#&lt;&gt;=?\[\]@{}'&#xA;&#xD; %-/À-ÖØ-öø-úü]*</td> </tr> </tbody> </table>	Kind	Value	Annotation	minLength	1		maxLength	72		pattern	[a-zA-Z0-9_!;"#<>=?\[\]@{}'
 %-/À-ÖØ-öø-úü]*	
Kind	Value	Annotation											
minLength	1												
maxLength	72												
pattern	[a-zA-Z0-9_!;"#<>=?\[\]@{}'
 %-/À-ÖØ-öø-úü]*												

simpleType **PXNameAddressString**

type	restriction of xs:string		
properties	base	xs:string	
used by	simpleTypes	NameAddressString27 NameAddressString35 NameAddressString72	
facets	Kind	Value	Annotation
	pattern	[a-zA-Z0-9_!;"#<>=?\[\]@{}'
 %-/À-ÖØ-öø-ú]*	

simpleType **PXString**

type	restriction of xs:string		
properties	base	xs:string	
used by	simpleTypes	Email ISO639 String10 String15 String25 String30 String35	
facets	Kind	Value	Annotation
	minLength	1	
	pattern	[a-zA-Z0-9_!;"#<>=?\[\]@{}'
 %-/À-ÖØ-öø-ú]*	

simpleType **String10**

type	restriction of PXString		
properties	base	PXString	
used by	element	CustomerJournal/CustomerJournalInfo/CustomerInfo/Category	
facets	Kind	Value	Annotation
	minLength	1	
	maxLength	10	
	pattern	[a-zA-Z0-9_!;"#<>=?\[\]@{}'
 %-/À-ÖØ-öø-ú]*	

simpleType **String15**

type	restriction of PXString		
properties	base	PXString	
used by	element complexType	CustomerJournal/CustomerJournalInfo/CustomerInfo/DistributionAddressInfo/Cellphone ReqNo	
facets	Kind	Value	Annotation
	minLength	1	
	maxLength	15	
	pattern	[a-zA-Z0-9_!;"#<>=?\[\]@{}'
 %-/À-ÖØ-öø-ú]*	

simpleType **String25**

type	restriction of PXString		
properties	base PXString		
facets	Kind	Value	Annotation
	minLength	1	
	maxLength	25	
	pattern	[a-zA-Z0-9_!;"#<>=?\[\]@{}'
 %-/À-ÖØ-öø-ú]*	

simpleType **String30**

type	restriction of PXString		
properties	base PXString		
facets	Kind	Value	Annotation
	minLength	1	
	maxLength	30	
	pattern	[a-zA-Z0-9_!;"#<>=?\[\]@{}'
 %-/À-ÖØ-öø-ú]*	

simpleType **String35**

type	restriction of PXString		
properties	base PXString		
facets	Kind	Value	Annotation
	minLength	1	
	maxLength	35	
	pattern	[a-zA-Z0-9_!;"#<>=?\[\]@{}'
 %-/À-ÖØ-öø-ú]*	

simpleType **String50**

type	restriction of xs:string		
properties	base xs:string		
facets	Kind	Value	Annotation
	maxLength	50	

simpleType **VatNumber**

type	restriction of xs:string		
properties	base xs:string		
used by	element	CustomerJournal/CustomerJournalInfo/CustomerInfo/VatNo	
facets	Kind	Value	Annotation
	minLength	7	
	maxLength	14	
	pattern	[A-Z]{2}.*	

simpleType **ZipCode**

type	restriction of xs:string		
properties	base	xs:string	
used by	element	Address/ZipCode	
facets	Kind	Value	Annotation
	maxLength	9	
	pattern	[A-Z0-9\-\-]+	